

Transmittance (T) units: %

λnm	200	210	220	230	240	250	260	270	280	290	300	310	320	330	340	350	360	370	380	390
T	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
λnm	400	410	420	430	440	450	460	470	480	490	500	510	520	530	540	550	560	570	580	590
T	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
λnm	600	610	620	630	640	650	660	670	680	690	700	710	720	730	740	750	760	770	780	790
T	0.1	4.9	36.7	70.1	83.7	88.0	89.4	89.8	90.1	90.2	90.2	90.2	90.3	90.3	90.3	90.3	90.3	90.3	90.2	90.2
λnm	800	810	820	830	840	850	860	870	880	890	900	910	920	930	940	950	960	970	980	990
T	90.2	90.2	90.3	90.3	90.4	90.3	90.3	90.3	90.4	90.4	90.4	90.5	90.4	90.5	90.6	90.6	90.6	90.7	90.6	90.7
λnm	1000	1010	1020	1030	1040	1050	1060	1070	1080	1090	1100	1120	1140	1160	1180	1200				
T	90.7	90.7	90.7	90.8	90.7	90.7	90.7	90.8	90.8	90.8	90.8	90.7	90.9	90.9	90.9	90.9				

Refractive Index/Absorption coefficient/Reflection coefficient

λnm	400	500	600	700	800	900	1000
n	1.552	1.542	1.533	1.528	1.525	1.523	1.521
K	1.2E-02	3.9E-03	1.7E-04	3.4E-13	1.0E-31	1.5E-53	1.0E-75
P	0.911	0.913	0.915	0.917	0.917	0.918	0.918

Classes of Bubbles and Inclusions

Bubble Class
3

Color Specification


	x	y	Y	λ _d	P _e
A	0.714	0.286	10	635	100
C	0.712	0.288	6	634	100
D65	0.712	0.288	5	633	100

Properties

Chemical		Thermal				Mechanical		Others
D _w	D _A	T _g	T _s	α _{-30/70}	α _{100/300}	H _K	F _A	d
1	1	560	620	95	107	520	140	2.68

Tolerance of Transmittance (τ)

λτ (nm)	Δλ (nm)	TH (%)
620±5	<25	>85

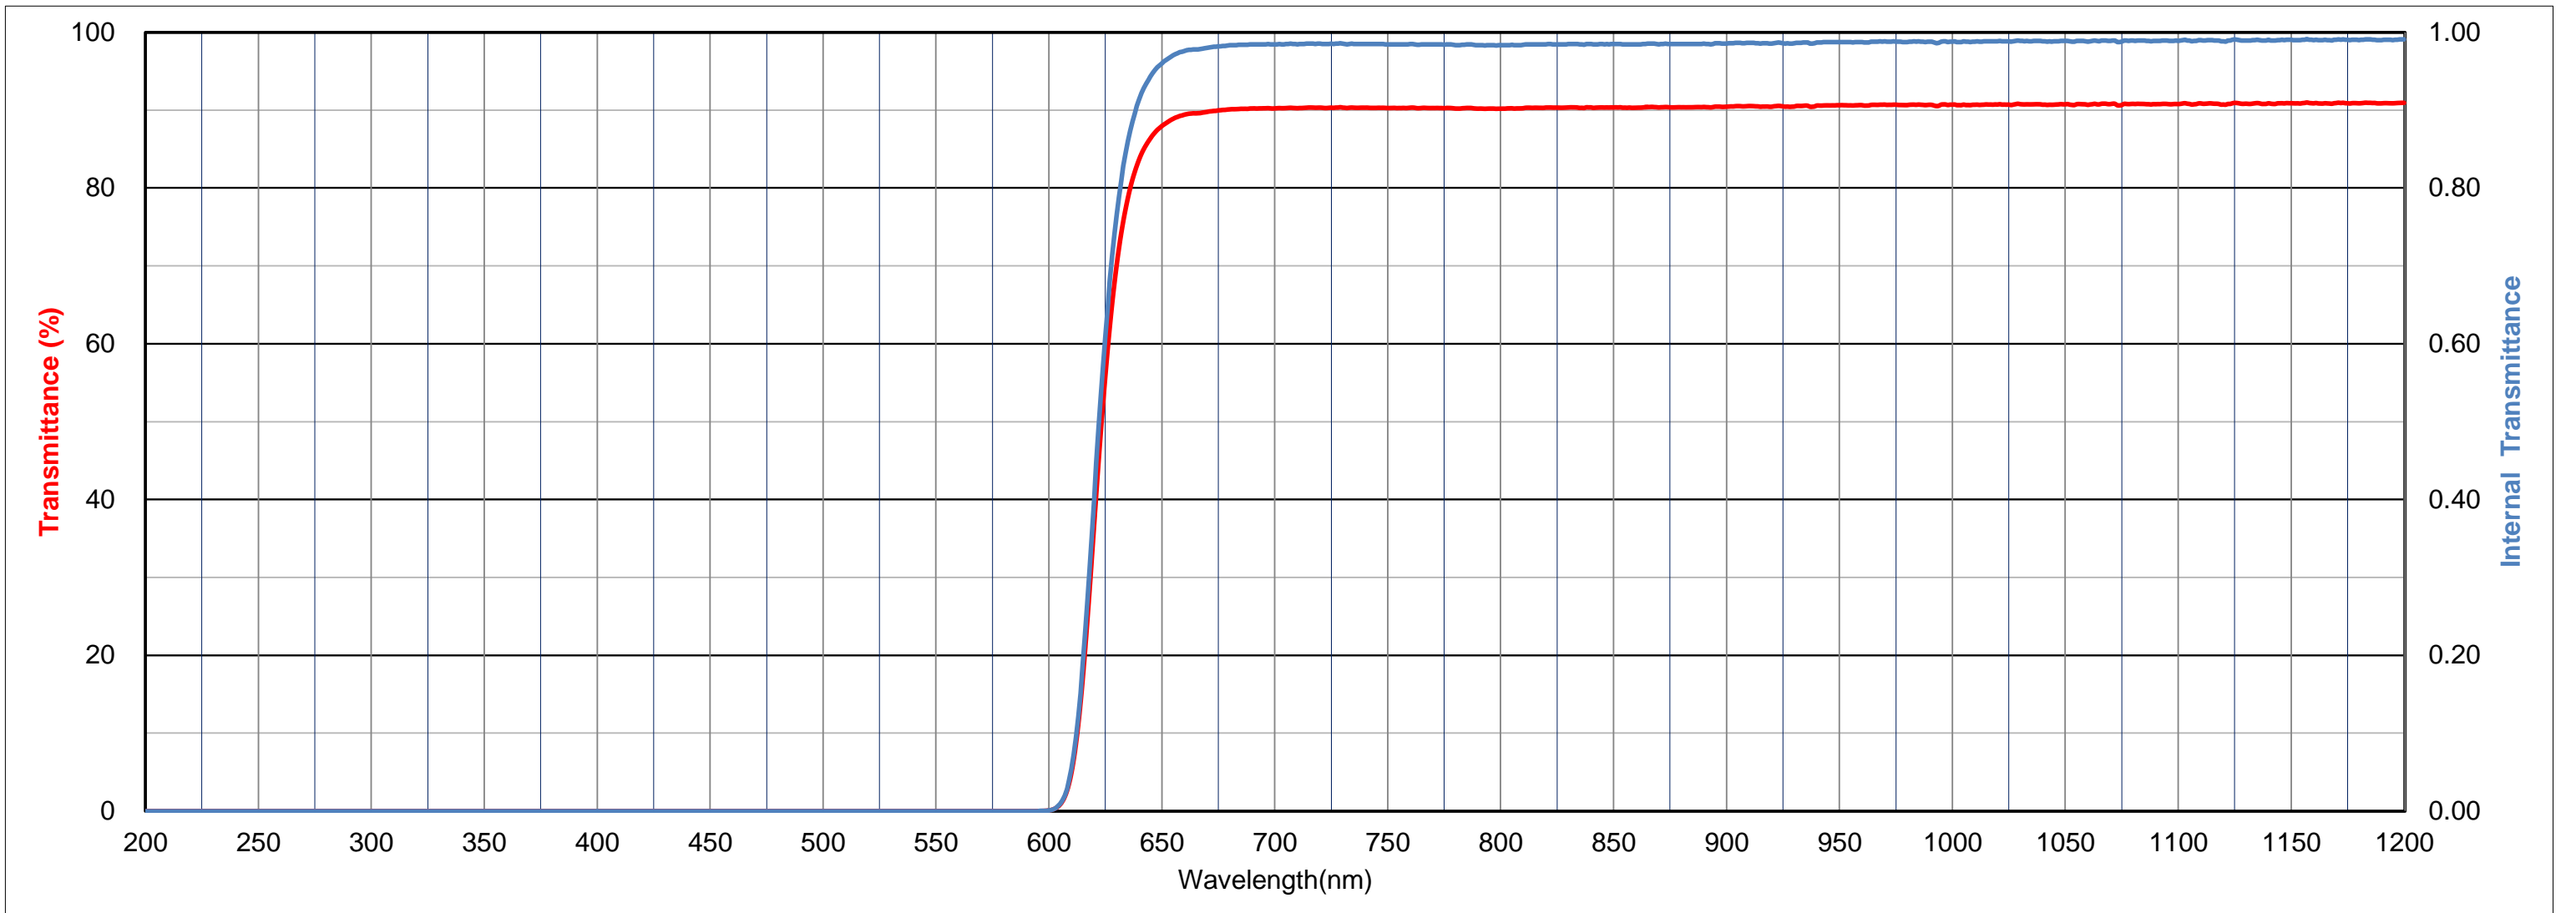



HOYA CANDEO OPTRONICS CORPORATION

GALVOPTICS LTD - Harvey Rd - Basildon - Essex - SS13 1ES - UK

HOYA R-62 LONGPASS FILTER R62


<https://www.galvoptics.co.uk/optical-components/optical-filters/hoya-longpass-filters/>

Thickness 2.50 mm

R62

Transmittance (T) units: %

λnm	200	210	220	230	240	250	260	270	280	290	300	310	320	330	340	350	360	370	380	390
T	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
λnm	400	410	420	430	440	450	460	470	480	490	500	510	520	530	540	550	560	570	580	590
T	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
λnm	600	610	620	630	640	650	660	670	680	690	700	710	720	730	740	750	760	770	780	790
T	0.1	4.9	36.7	70.1	83.7	88.0	89.4	89.8	90.1	90.2	90.2	90.2	90.3	90.3	90.3	90.3	90.3	90.3	90.2	90.2
λnm	800	810	820	830	840	850	860	870	880	890	900	910	920	930	940	950	960	970	980	990
T	90.2	90.2	90.3	90.3	90.4	90.3	90.3	90.3	90.4	90.4	90.4	90.5	90.4	90.5	90.6	90.6	90.6	90.7	90.6	90.7
λnm	1000	1010	1020	1030	1040	1050	1060	1070	1080	1090	1100	1110	1120	1130	1140	1150	1160	1170	1180	1190
T	90.7	90.7	90.7	90.8	90.7	90.7	90.7	90.8	90.8	90.8	90.8	90.9	90.7	90.8	90.9	90.9	90.9	90.9	90.9	90.9
λnm	1200	1210	1220	1230	1240	1250	1260	1270	1280	1290	1300	1310	1320	1330	1340	1350	1360	1370	1380	1390
T	90.9	91.0	90.9	90.9	90.9	90.9	90.9	91.0	90.9	91.0	91.0	90.9	90.9	90.9	90.8	90.8	90.8	90.8	90.7	90.7
λnm	1400	1410	1420	1430	1440	1450	1460	1470	1480	1490	1500	1510	1520	1530	1540	1550	1560	1570	1580	1590
T	90.7	90.7	90.7	90.8	90.9	91.0	91.1	91.1	91.1	91.1	91.1	91.1	91.2	91.1	91.2	91.2	91.1	91.1	91.1	91.1
λnm	1600	1610	1620	1630	1640	1650	1660	1670	1680	1690	1700	1710	1720	1730	1740	1750	1760	1770	1780	1790
T	91.1	91.1	91.1	91.1	91.1	91.1	91.1	91.1	91.0	91.0	91.0	90.9	90.9	90.9	90.8	90.8	90.8	90.7	90.7	90.7
λnm	1800	1810	1820	1830	1840	1850	1860	1870	1880	1890	1900	1910	1920	1930	1940	1950	1960	1970	1980	1990
T	90.7	90.6	90.6	90.6	90.6	90.6	90.5	90.5	90.5	90.4	90.4	90.4	90.4	90.3	90.3	90.2	90.2	90.1	90.1	90.1
λnm	2000	2050	2100	2150	2200	2250	2300	2350	2400	2450	2500	2550	2600	2650	2700	2750	2800	2850	2900	2950
T	90.0	89.9	89.5	89.0	88.2	87.7	87.7	87.6	87.1	86.5	85.9	85.6	85.0	84.1	81.1	47.2	32.4	30.0	28.4	27.1
λnm	3000	3050	3100	3150	3200	3250	3300	3350	3400	3450	3500	3550	3600	3650	3700	3750	3800	3850	3900	3950
T	25.6	24.0	22.2	20.5	18.8	17.4	16.1	15.0	13.9	13.0	12.4	12.0	12.2	12.3	12.5	13.3	14.6	16.2	16.7	16.3
λnm	4000	4050	4100	4150	4200	4250	4300	4350	4400	4450	4500	4550	4600	4650	4700	4750	4800	4850	4900	4950
T	15.7	15.0	14.3	13.3	11.8	9.8	7.6	5.6	3.6	2.1	1.0	0.4	0.1	0.1	0.0	0.0	0.0	0.0	0.0	0.0
λnm	5000																			
T	0.0																			

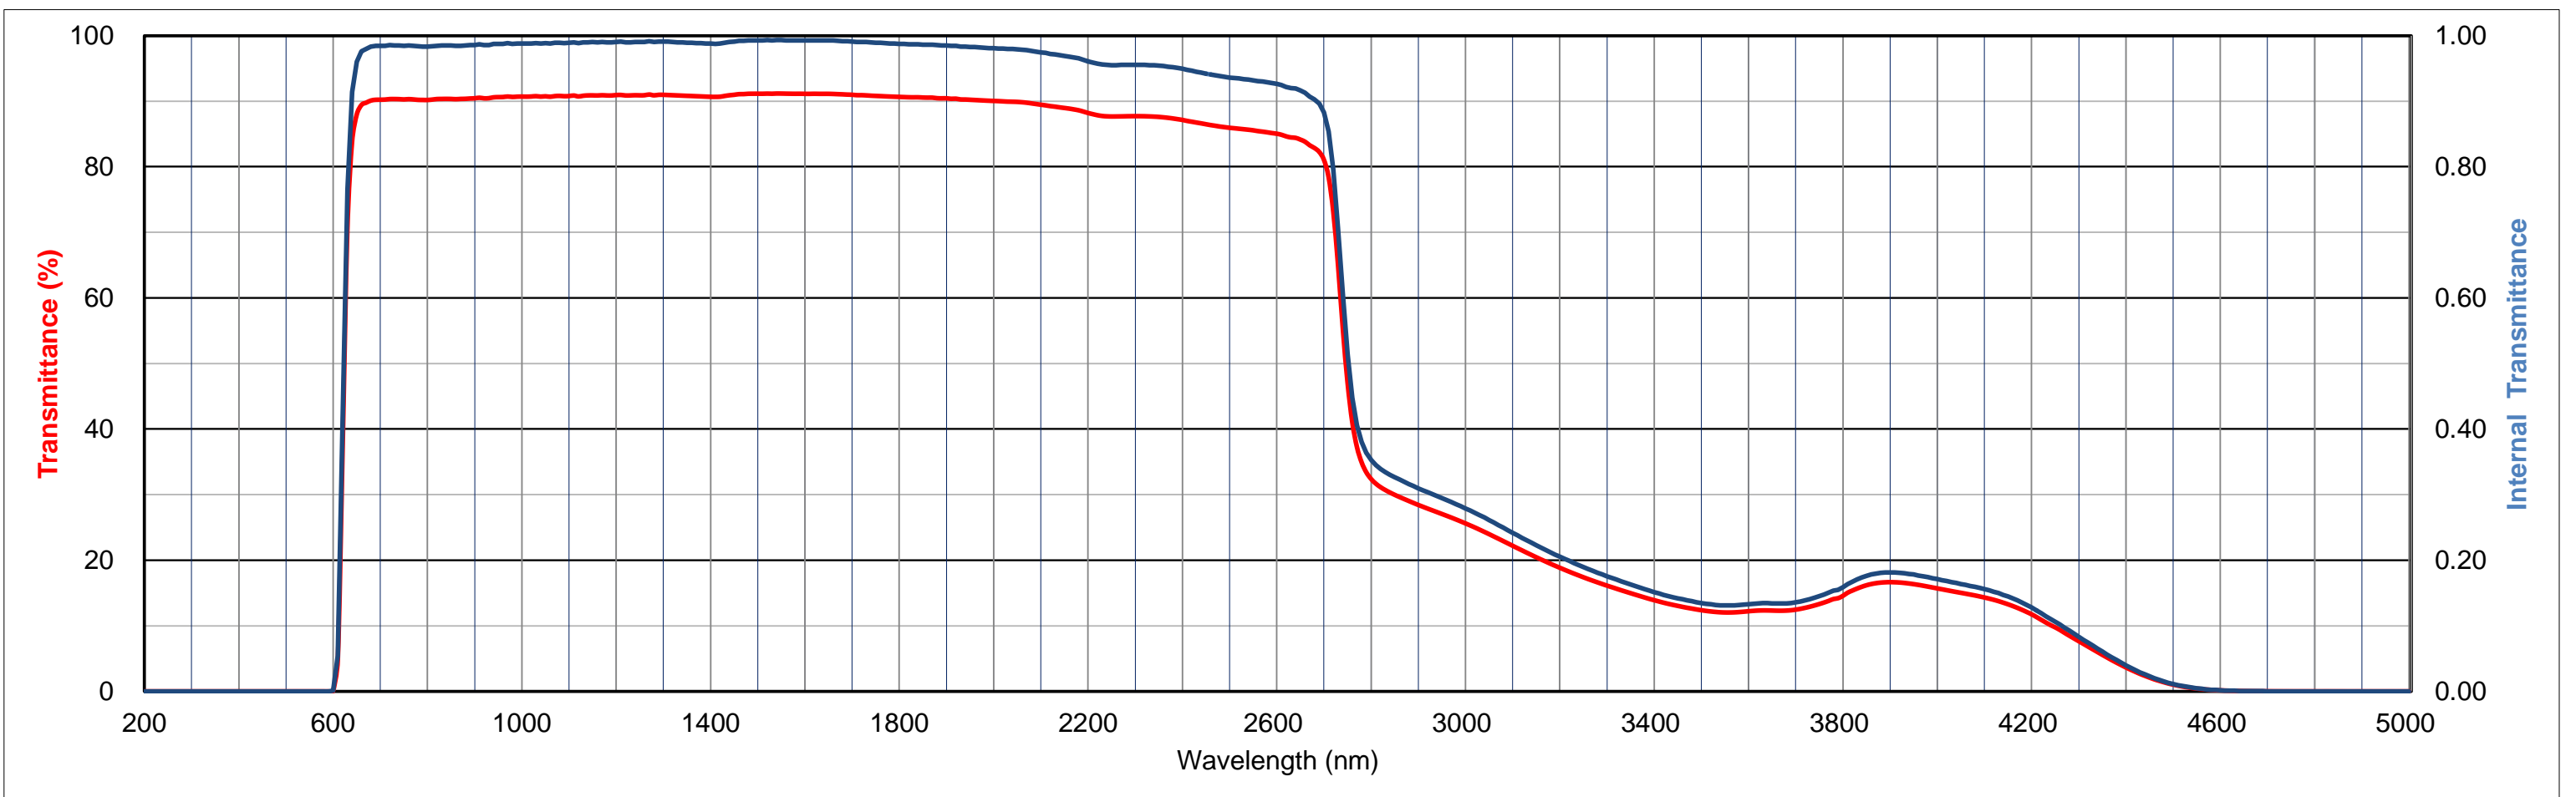

All data is mean values of various melts.

The content of this catalog is accurate as of April ,2014

Tel: +44 (0) 1268 728077

email: info@galvoptics.co.uk

Fax: +44 (0) 1268 590445