HOYA

HOYA CANDEO OPTRONICS CORPORATION

GALVOPTICS LTD - Harvey Rd - Basildon - Essex - SS13 1ES – UK

HOYA R-66 LONGPASS FILTER R66

https://www.galvoptics.co.uk/optical-components/optical-filters/hoya-longpass-filters/

Thickness 2.50 mm

R66

Transmittance (T) units: %

λnm	200	210	220	230	240	250	260	270	280	290	300	310	320	330	340	350	360	370	380	390
τ	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
λnm	400	410	420	430	440	450	460	470	480	490	500	510	520	530	540	550	560	570	580	590
τ	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
λnm	600	610	620	630	640	650	660	670	680	690	700	710	720	730	740	750	760	770	780	790
τ	0.0	0.0	0.0	0.0	0.3	6.3	35.2	66.3	82.7	88.0	89.6	90.1	90.3	90.3	90.4	90.4	90.4	90.4	90.4	90.3
λnm	800	810	820	830	840	850	860	870	880	890	900	910	920	930	940	950	960	970	980	990
τ	90.4	90.4	90.5	90.5	90.5	90.6	90.5	90.5	90.6	90.6	90.6	90.7	90.6	90.7	90.8	90.9	90.9	90.9	91.0	91.0
λnm	1000	1010	1020	1030	1040	1050	1060	1070	1080	1090	1100	1120	1140	1160	1180	1200				
τ	90.9	91.0	91.0	91.0	91.0	91.0	91.0	91.0	91.0	91.0	91.1	91.0	91.2	91.1	91.2	91.2				

Refractive Index/Absorption coefficient/Reflection coefficent

λnm	400	500	600	700	800	900	1000
n	1.551	1.542	1.535	1.529	1.526	1.524	1.523
K	1.3E-02	5.2E-03	1.2E-03	6.5E-08	1.2E-16	7.2E-27	3.4E-37
P	0.911	0.913	0.915	0.916	0.917	0.917	0.918

Classes of Bubbles and Inclusions

Bubble Class
3

Color Specification

	x	y	Y	λ_d	P_e
A	-	-	-	-	-
C	-	-	-	-	-
D65	-	-	-	-	-

Properties

Chemical		Thermal				Mechanical		Others
D_W	D_A	Tg	Ts	α -30/70	α 100/300	H_K	F_A	d
1	3	530	565	98	117	470	160	2.85

Tolerance of Transmittance (τ)

λτ (nm)	◿λ (nm)	TH (%)
660±5	<35	>85

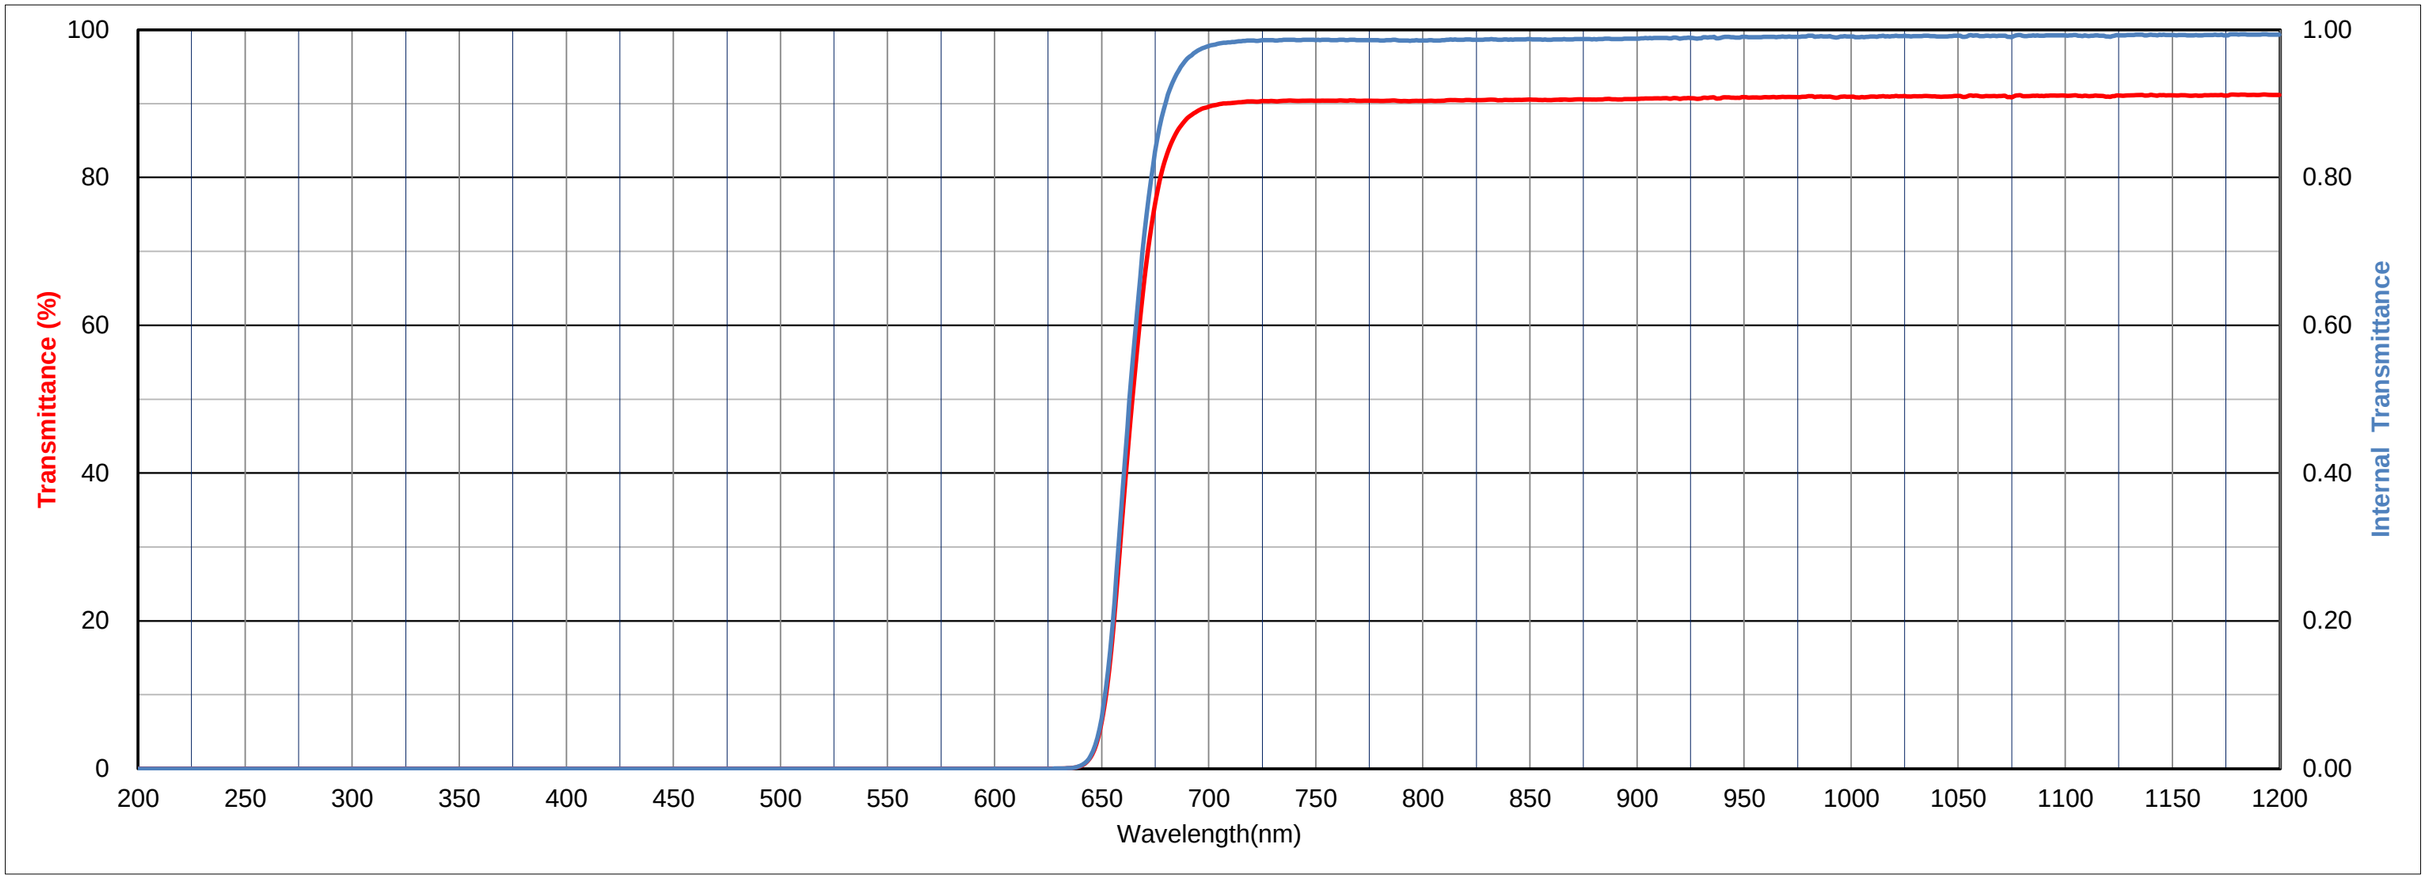

All data is mean values of various melts.

The content of this catalog is accurate as of April ,2014

Tel: +44 (0) 1268 728077 email: info@galvoptics.co.uk Fax: +44 (0) 1268 590445

GALVOPTICS LTD - Harvey Rd - Basildon - Essex - SS13 1ES – UK

HOYA R-66 LONGPASS FILTER R66

https://www.galvoptics.co.uk/optical-components/optical-filters/hoya-longpass-filters/

Thickness 2.50 mm

R66

HOYA CANDEO OPTRONICS CORPORATION

Transmittance (T) **units: %**

λnm	200	210	220	230	240	250	260	270	280	290	300	310	320	330	340	350	360	370	380	390
τ	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
λnm	400	410	420	430	440	450	460	470	480	490	500	510	520	530	540	550	560	570	580	590
τ	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
λnm	600	610	620	630	640	650	660	670	680	690	700	710	720	730	740	750	760	770	780	790
τ	0.0	0.0	0.0	0.0	0.3	6.3	35.2	66.3	82.7	88.0	89.6	90.1	90.3	90.3	90.4	90.4	90.4	90.4	90.4	90.3
λnm	800	810	820	830	840	850	860	870	880	890	900	910	920	930	940	950	960	970	980	990
τ	90.4	90.4	90.5	90.5	90.5	90.6	90.5	90.5	90.6	90.6	90.6	90.7	90.6	90.7	90.8	90.9	90.9	90.9	91.0	91.0
λnm	1000	1010	1020	1030	1040	1050	1060	1070	1080	1090	1100	1110	1120	1130	1140	1150	1160	1170	1180	1190
τ	90.9	91.0	91.0	91.0	91.0	91.0	91.0	91.0	91.0	91.0	91.1	91.0	91.0	91.1	91.2	91.1	91.1	91.2	91.2	91.2
λnm	1200	1210	1220	1230	1240	1250	1260	1270	1280	1290	1300	1310	1320	1330	1340	1350	1360	1370	1380	1390
τ	91.2	91.1	91.2	91.3	91.1	91.2	91.1	91.2	91.2	91.3	91.2	91.2	91.2	91.2	91.2	91.1	91.1	91.1	91.1	91.1
λnm	1400	1410	1420	1430	1440	1450	1460	1470	1480	1490	1500	1510	1520	1530	1540	1550	1560	1570	1580	1590
τ	91.1	91.1	91.1	91.2	91.3	91.4	91.4	91.4	91.3	91.4	91.4	91.3	91.3	91.4	91.4	91.4	91.4	91.4	91.4	91.4
λnm	1600	1610	1620	1630	1640	1650	1660	1670	1680	1690	1700	1710	1720	1730	1740	1750	1760	1770	1780	1790
τ	91.4	91.4	91.3	91.3	91.3	91.3	91.2	91.2	91.2	91.1	91.1	91.1	91.1	91.0	91.0	90.9	90.9	90.9	90.8	90.8
λnm	1800	1810	1820	1830	1840	1850	1860	1870	1880	1890	1900	1910	1920	1930	1940	1950	1960	1970	1980	1990
τ	90.8	90.7	90.7	90.7	90.7	90.6	90.6	90.6	90.5	90.5	90.5	90.4	90.4	90.3	90.3	90.3	90.3	90.2	90.2	90.1
λnm	2000	2050	2100	2150	2200	2250	2300	2350	2400	2450	2500	2550	2600	2650	2700	2750	2800	2850	2900	2950
τ	90.1	89.9	89.5	89.0	88.2	87.6	87.6	87.5	87.0	86.4	85.8	85.4	84.9	84.0	80.8	45.9	30.9	28.5	27.0	25.6
λnm	3000	3050	3100	3150	3200	3250	3300	3350	3400	3450	3500	3550	3600	3650	3700	3750	3800	3850	3900	3950
τ	24.2	22.6	20.8	19.1	17.5	16.0	14.8	13.7	12.7	11.9	11.4	11.1	11.3	11.5	11.7	12.5	13.7	15.3	15.8	15.6
λnm	4000	4050	4100	4150	4200	4250	4300	4350	4400	4450	4500	4550	4600	4650	4700	4750	4800	4850	4900	4950
τ	15.0	14.4	13.7	12.7	11.2	9.4	7.4	5.4	3.5	2.1	1.0	0.4	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0
λnm	5000																			
τ	0.0																			

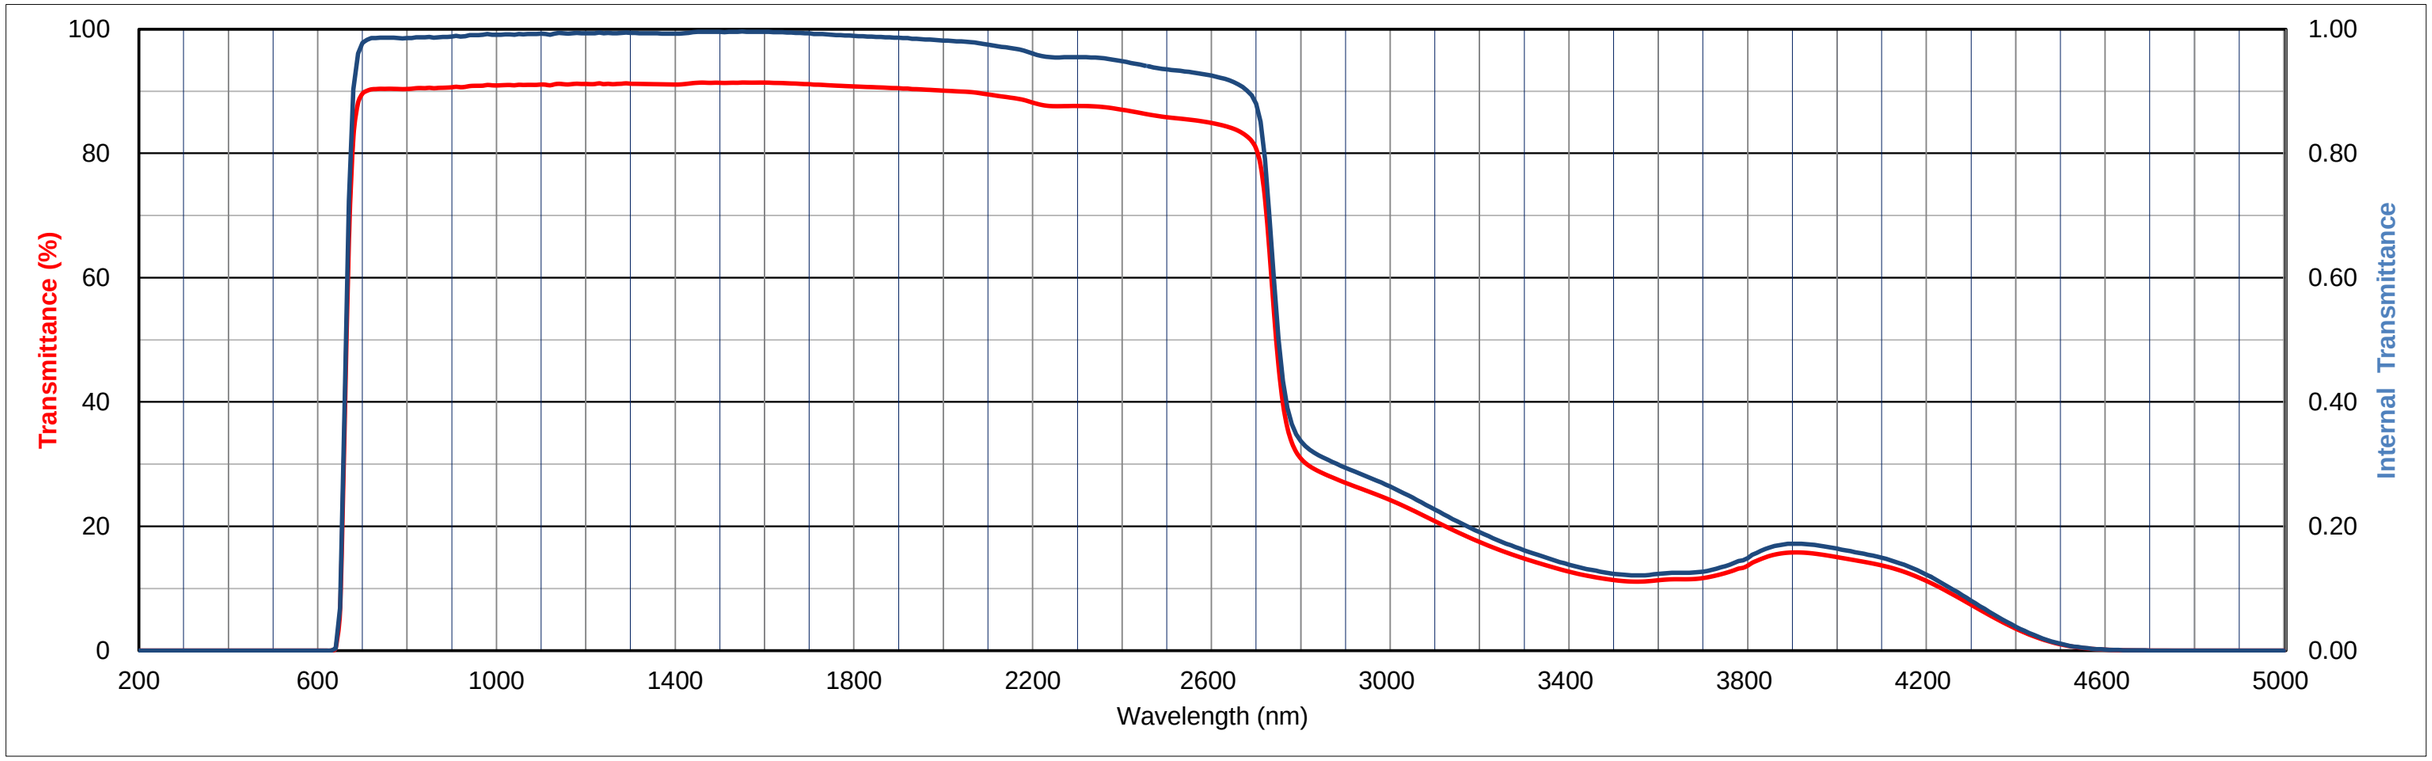

All data is mean values of various melts.

The content of this catalog is accurate as of April ,2014

Tel: +44 (0) 1268 728077 email: info@galvoptics.co.uk Fax: +44 (0) 1268 590445